


A compact device with GPRS and satellite connectivity, the SureLinx 8100 provides uninterrupted global coverage at the lowest message cost.



The dual-mode SureLinx 8100 provides customers with the advantage of global coverage and reduced operational costs by intelligently delivering data messages using lowest-cost message routing. It uses cellular frequencies when in range of terrestrial networks and seamlessly switches to SkyWave IsatM2M satellite service in other areas. This ensures that assets moving anywhere in the world are easily reachable at all times.

The SureLinx 8100 works with the SkyWave's Versa gateway to provide a single, easy-to-use interface to both GPRS/EDGE and IsatM2M networks. Our integrated approach ensures a high level of dependability, performance and satisfaction.

Our common development toolkit allows you to quickly create new applications and add new features—all designed to achieve significant cost savings in the development and support of your applications.

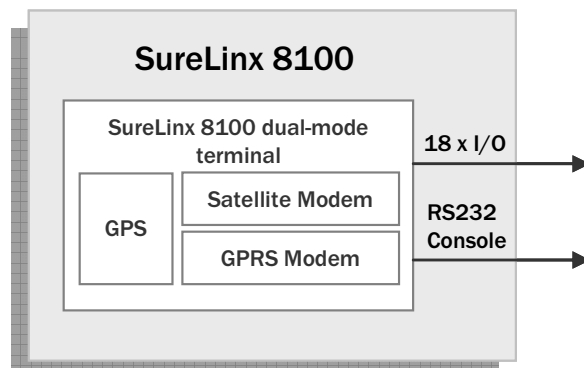

Features & Benefits include:

- **Fully-integrated satellite/cellular package** eliminates integration and installation issues. Increase reliability while reducing integration and support costs.
- **Exception-based reporting** based on time, distance, Geofence or other criteria reduces operating costs without sacrificing functionality.
- **Intelligent message routing** increases reliability and lowers networking costs by automatically selecting which network to use.
- **Data Log** maintains detailed information that can be extracted when convenient and cost-effective.
- **Low-profile Inmarsat/GPS antenna** can be installed inconspicuously for security applications.
- **Over-the-air programming** enables remote reconfiguration—anytime and anywhere.
- **Common development platform** allows customers to use the same great tools for creating applications on both the DMR and SureLinx platforms.

The SureLinx 8100 includes a quad-band GPRS transceiver, a SkyWave IsatM2M satellite transceiver, GPS chip, access to discrete input/output feeds and a programmable controller.

SureLinx™ 8100 Satellite/GPRS Terminal

Physical

Size	<ul style="list-style-type: none">Transceiver: 155 x 125 x 38 mmSatellite antenna: 127 x 93 x 23 mm
Mass	<ul style="list-style-type: none">Transceiver: ~244 gSatellite antenna: 166 g (with 5 m cable)

Environmental

Operating Temperature	<ul style="list-style-type: none">Transceiver (satellite): -40°C to +70°CTransceiver (GPRS): -30°C to +65°CAntenna: -40°C to +85°C
Storage Temperature	<ul style="list-style-type: none">Transceiver and antennas: -40°C to +85°C
Humidity	<ul style="list-style-type: none">95% Relative Humidity at +30°C
Dust & Water Ingress	<ul style="list-style-type: none">Transceiver: IP40/NEMA1Satellite antenna: IP67/NEMA-4X
Vibration	<ul style="list-style-type: none">5-20 Hz; 1.92 m2/s3 random noise20-500 Hz; -3dB octave random noise
Shock (survival)	<ul style="list-style-type: none">Half sine 6ms, 300 m/s²

Electrical

Input Voltage	<ul style="list-style-type: none">9 VDC to 32 VDC
Power Consumption (typical @ 12VDC)	<ul style="list-style-type: none">Receive/tracking mode (GPS active): 1.32WTransmit: 10.5W (satellite); 8W (peak GPRS)Sleep: 300 µA
Mating Connector	<ul style="list-style-type: none">Transceiver I/O: JAE IL-AG5-30S-D3C1Satellite Antenna: Fakra FAI-NARP-PCB-MGPRS Antenna: SMA female

Satellite Communications

Frequency	<ul style="list-style-type: none">Rx: 1525.0 to 1559.0 MHzTx: 1626.5 to 1660.5 MHz
EIRP	<ul style="list-style-type: none">9 dBW max
Elevation Angle	<ul style="list-style-type: none">0 to +90 degrees

GSM/GPRS Communications

Frequency	<ul style="list-style-type: none">850/900/1800/1900 MHz
GPRS data	<ul style="list-style-type: none">Class 12 multislot; Coding scheme 1 to 4Class B mobile station; Full PBCCH supportSupports NMEA formatted output from GPS
Output Power	<ul style="list-style-type: none">Class 4 – 33dBm ± 2dB for EGSM 850/900Class 1 – 30dBm ± 2dB for GSM 1800/1900
Subscriber Identity Module (SIM) Card	<ul style="list-style-type: none">3.3 V SIM (Customer Supplied)

GPS

Channels	<ul style="list-style-type: none">16 channels; 1575.42 MHz
Acquisition Time	<ul style="list-style-type: none">Cold-start 41.5s; SuperSense®
Accuracy	<ul style="list-style-type: none">3 m CEP; 5 m SEP

Certifications & Compliance

Satellite	<ul style="list-style-type: none">Inmarsat Type Approval DCC009
GPRS	<ul style="list-style-type: none">PTCRB
Regulatory	<ul style="list-style-type: none">FCC, RoHS, Anatel, IC pendingCE0470 (R&TTE)

Data Log

Extraction	<ul style="list-style-type: none">GPRS, Satellite or RS232
Capacity	<ul style="list-style-type: none">More than 17,000 points

External Interfaces

Serial	<ul style="list-style-type: none">RS232: 1 console interface, 1 peripheral interface
Analog/Digital	<ul style="list-style-type: none">Up to 18 inputs or outputs4 wake-up enabled

From-Terminal Messaging

IsatM2M	<ul style="list-style-type: none">Up to 25.5-byte payload
GPRS	<ul style="list-style-type: none">Up to 200-byte payload

To-Terminal Messaging

IsatM2M	<ul style="list-style-type: none">4 alert codes + Up to 100 bytes
GPRS	<ul style="list-style-type: none">Up to 200 bytes

Ordering Codes

SM200235-GS5	<ul style="list-style-type: none">SureLinx 8100 Satellite/GPRS terminal; GPS, side-mount magnet with 5m antenna cable. Mating cable included.
SM200235-GM5	<ul style="list-style-type: none">SureLinx 8100 Satellite/GPRS terminal; GPS, side-mount with 5m antenna cable. Mating cable included.
SM200235-GB5	<ul style="list-style-type: none">SureLinx 8100 Satellite/GPRS; GPS, bottom-mount with 5m antenna cable. Mating connector included.
SM200251-EA1	<ul style="list-style-type: none">Evaluation Kit for SureLinx 8100; includes terminal, limited airtime, support & training.

Note: Unpackaged antennas, transceivers and variable length cables are available. Contact a SkyWave representative for more information.



For more information
visit www.skymira.com
or call 866.521.0540



Positioning technology
provided by

About SkyWave Mobile Communications

SkyWave Mobile Communications designs and manufactures integrated D+/IsatM2M satellite terminals, dual-mode satellite/GPRS terminals and provides network services to enable dependable, low-cost, remote management, security and logistics solutions for fixed and mobile assets. SkyWave's products are designed for a broad range of industries including land mobile, marine, oil & gas, SCADA, government and defence.

www.SkyWave.com
Phone: +1 613-836-4844
Email: info@skywave.com

SkyWave